


DIMENSIONS & NOMINAL VALUES

TYPE	Depth of immersion h (mm)	a b c			Weight kg	Power kW	Voltage V(ΔY)	Frequency Hz	Rated current A	Speed rpm
		mm								
HCB/06	206	157	319	118	16.5	1.1	230/400	50	4.42/2.55	2840
HCB/08	248	157	319	118	17.0	1.1	230/400		4.42/2.55	2840
HCB/10	291	176	365	139	23.0	2.2	230/400		8.23/4.75	2870
HCB/12	333	176	365	139	23.5	2.2	230/400		8.23/4.75	2870
HCB/15	396	176	365	139	27.0	3.0	230/400		11.43/6.6	2840
HCB/17	438	176	365	139	27.5	3.0	230/400		11.43/6.6	2840
HCB/20	501	194	397	150	34.0	4.0	230/400		13.6/7.85	2860
HCB/22	543	194	397	150	34.5	4.0	230/400		13.6/7.85	2860
HCB/25	606	194	397	150	35.5	4.0	230/400		13.6/7.85	2860



Performance Curve

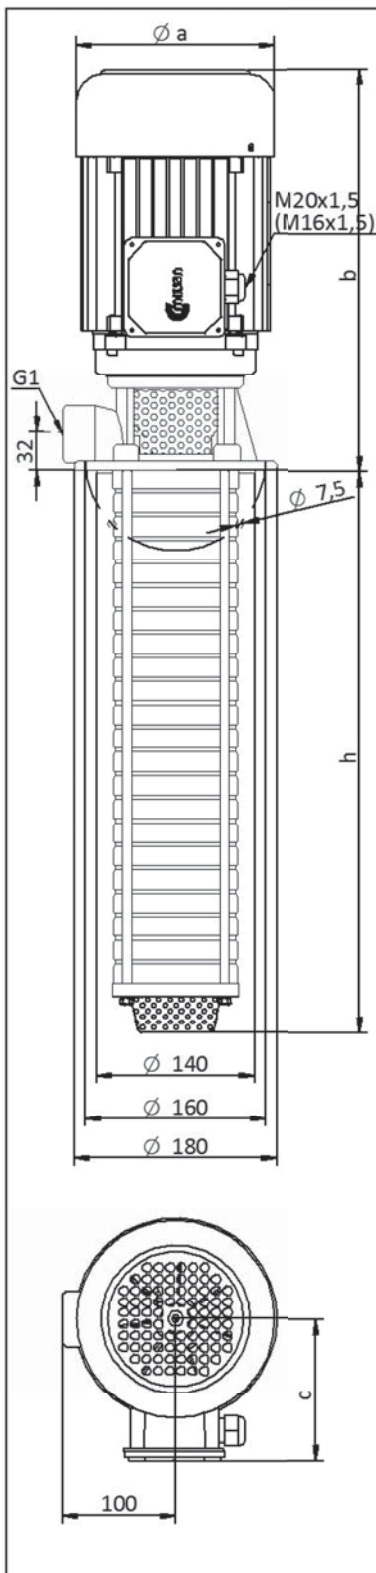