

Centralized LUBRICATION SYSTEMS


Home > English > Products > Single Line Resistance Systems > Resistance Lubricators > Automatic Resistance Cyclic Lubricator



YET-R1-3L
YET-R1-4L

Lubrication system
[Diagram](#)

AUTOMATIC RESISTANCE LUBRICATOR YET-R1

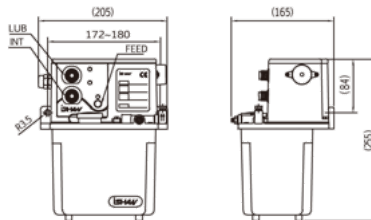

Feature

Specifications

Model	YET-R1			
Voltage (Single Phase)	110V or 220V			
Consumption Power (W)	80			
Capacity of Terminal Output (A)	3			
Lubrication Time (second)	1-180			
Intermittent Time (minute)	1-180			
Output bore	Ø4 or Ø6			
Max. Output Pressure Mpa (kgf/cm ²)	0.5 (5)			
Output Volume (cc/mm)	200			
Float Switch	O			
Pressure Gauge	X	O	O	O
Alarm Beeper	O			
Tank Capacity (L)	2	3	4 (Transparent Plastic Tank)	4 (Aluminum Tank)
Weight (kg)	2.6	2.9	3.2	3.6

Note: Because of continuous improvements, above specifications are subject to change without prior notice.

Products List

Positive Displacement Injection System

Single Line Resistance Systems

Proportion Devices

Proportion Devices

Resistance Lubricators

Rock Type Oiler/ Pull Type Oiler

▶ YML / YMT

Automatic Manual Type Lubricator

▶ YESA / YESB

Microcomputer Resist Lubricator

▶ YET-A1 / YET-A1P1

Automatic Resistance Lubricator

▶ YET-C1/ YET-C1P1

-->

▶ YAE Automatic Resist Lubricator

▶ YAC ▶ YAP / YAH

Cooling Cycle Lubrication Systems

Forced Cycle Lubrication Systems

Spray Mist Lubrication Systems

Grease Lubrication Systems

Metering for Progressive Systems

Motor & Fittings/ Accessories

Search

Search



www.ishan.com.tw