


Technical features and performances

- Specific motor-driven pump for machine tools with dip tube without sealing rings.
- Single-phase motor with shielded poles
- CL "F" windings
- AISI 303 stainless steel crankshaft
- CW long-life bearings
- Degree of protection against the penetration of liquids: IP 54.
- All parts of the motor are made of non-flammable thermoplastic material in accordance with the following standards: VDE 0730 and UL 94

Various notes and warnings

- We can supply motors with input voltages and frequencies that meet the specific needs of the customer.
- Only two wires can be taken off the three-phase lines:
 - Three-phase line 230V connects between 0 - 230
 - Three-phase line 400V connects between 0 - 400
- CE-UL-CSA power cables available on request

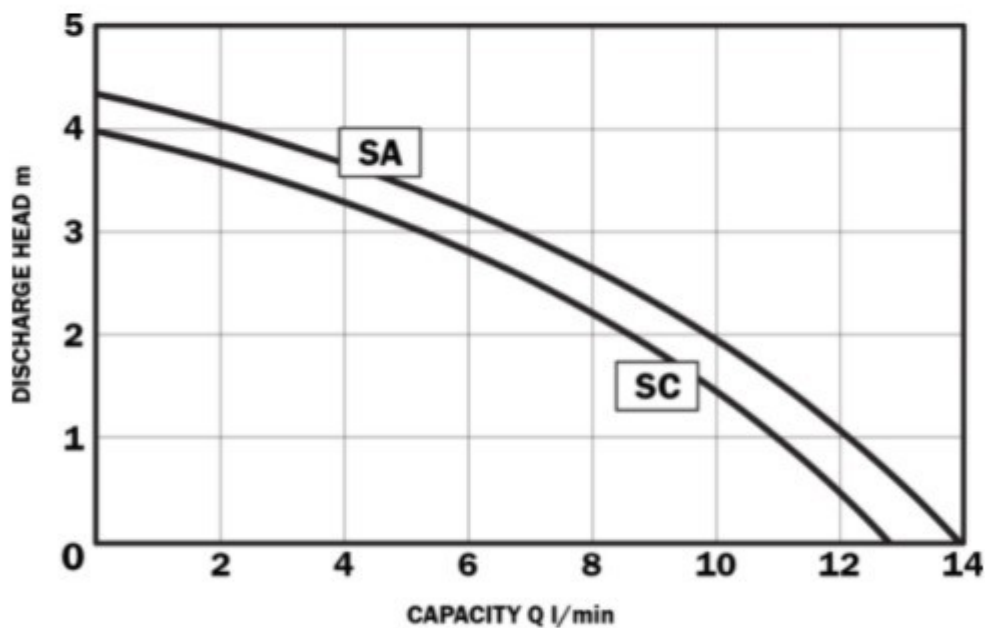

TYPE	VOLT/Hz	A	B	C	D	E
SA	230/400/50	82	60	75	8	3/8 GAS
			85			
SC	230/400/50	72	120			
			150			